

## Silicon Super Fast Recovery Diode

 $V_{RRM} = 50\text{ V} - 600\text{ V}$ 
 $I_F = 400\text{ A}$ 

### Features

- High Surge Capability
- Types up to 600 V  $V_{RRM}$

**Twin Tower Package**


### Maximum ratings, at $T_j = 25\text{ °C}$ , unless otherwise specified ("R" devices have leads reversed)

Parameter	Symbol	Conditions	MUR40040CT (R)	MUR40060CT (R)	Unit
Repetitive peak reverse voltage	$V_{RRM}$		400	600	V
RMS reverse voltage	$V_{RMS}$		280	420	V
DC blocking voltage	$V_{DC}$		400	600	V
Continuous forward current	$I_F$	$T_C \leq 125\text{ °C}$	400	400	A
Surge non-repetitive forward current, Half Sine Wave	$I_{F,SM}$	$T_C = 25\text{ °C}$ , $t_p = 8.3\text{ ms}$	2400	2400	A
Operating temperature	$T_j$		-40 to 175	-40 to 175	°C
Storage temperature	$T_{stg}$		-40 to 175	-40 to 175	°C

### Electrical characteristics, at $T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Conditions	MUR40040CT (R)	MUR40060CT (R)	Unit
Diode forward voltage	$V_F$	$I_F = 125\text{ A}$ , $T_j = 25\text{ °C}$	1.5	1.7	V
Reverse current	$I_R$	$V_R = 50\text{ V}$ , $T_j = 25\text{ °C}$	25	25	$\mu\text{A}$
		$V_R = 50\text{ V}$ , $T_j = 125\text{ °C}$	3	3	mA

### Recovery Time

Maximum reverse recovery time	$T_{RR}$	$I_F = 0.5\text{ A}$ , $I_R = 1.0\text{ A}$ , $I_{RR} = 0.25\text{ A}$	150	180	nS
-------------------------------	----------	---	-----	-----	----

### Thermal characteristics

Thermal resistance, junction	$R_{thJC}$		0.14	0.14	°C/W
------------------------------	------------	--	------	------	------

Figure .1- Typical Forward Characteristics

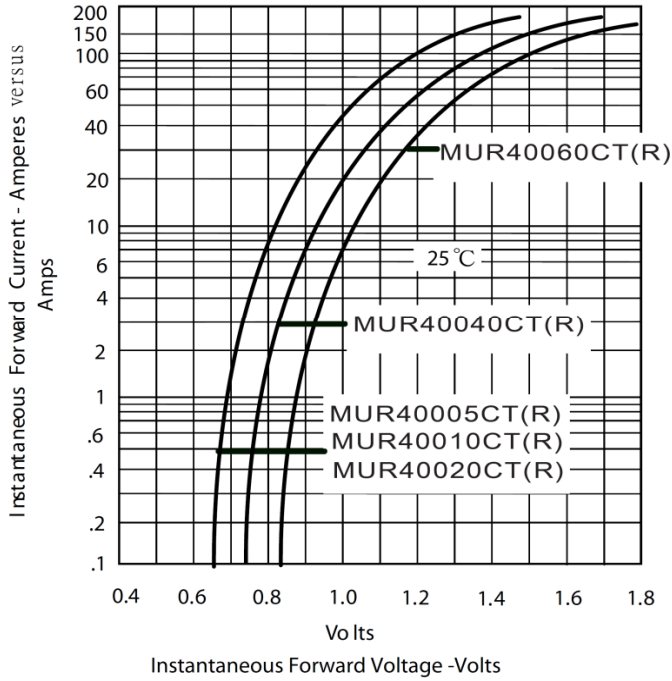


Figure .2- Forward Derating Curve

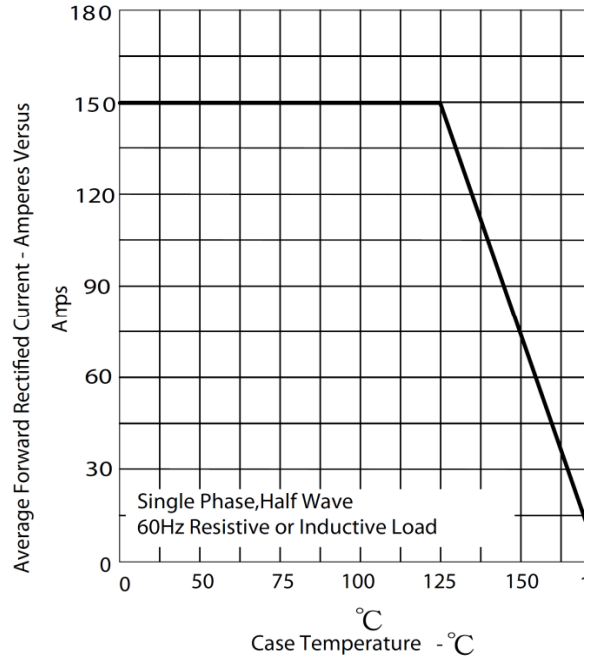


Figure.3- Peak Forward Surge Current

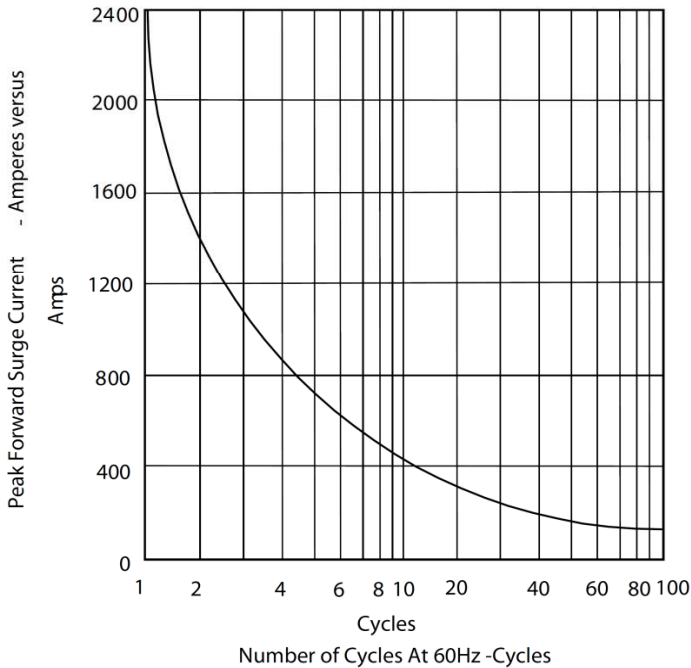


Figure.4- Typical Reverse Characteristics

