SECTION A-A

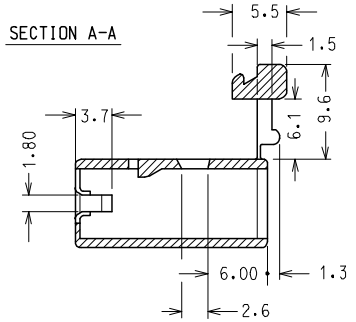


SECTION B-B

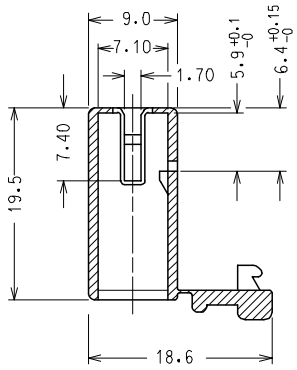


DIMA 9 VIE PER C.S. spess. 1.5 ±0.1
*VISTA LATO COMPONENTI*
RECOMMENDED PCB LAYOUT, PCB THICK.: 1.5 ±0.1
*VIEW FROM COMPONENT SIDE*

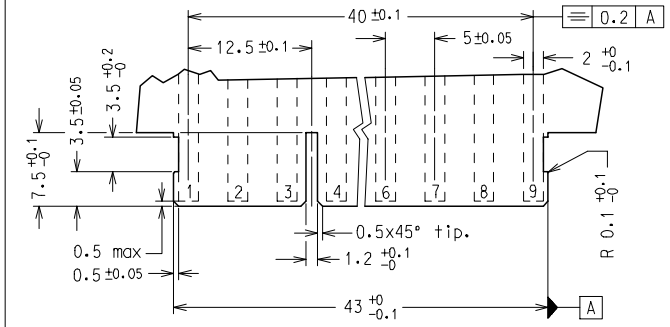


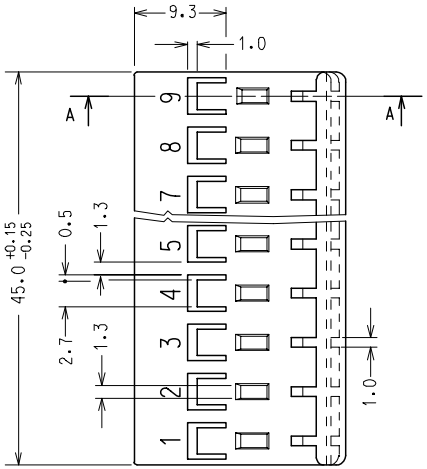


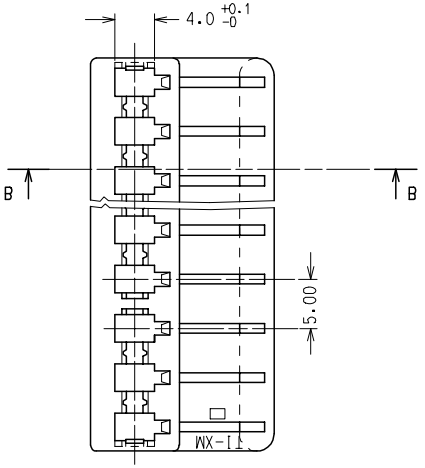


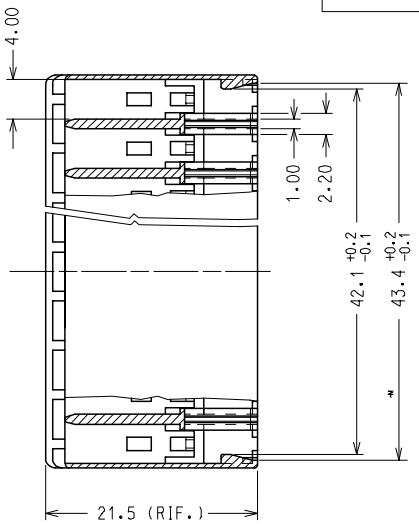


| CODICE P/N | MATERIAL |
|---|---|
| 94529-9109 | PA 6.6 NAT. UL94 V2 GWT 850 °C |
| 94529-4109 | NYLON 6.6 GWT 750 °C sec. IEC 60335-1 TEST METHOD IEC 60695-2-11 NATURAL |

NOTA: LE DIMENSIONI VANNO MISURATE CON CORPI STABILIZZATI.
(AUMENTO IN PESO DEL 2.7 %)

*NOTE: PARTS SHALL BE DIMENSIONALLY CHECKED AFTER ATTAINING EQUILIBRIUM CONDITIONS E.G. 2.7 % INCREASE IN WEIGHT FOR HUMIDITY ABSORPTION FROM DRY STATUS.*

CARATTERISTICHE PRODOTTO SECONDO PS-94529
*PRODUCT CHARACTERISTICS ACCORDING TO PS-94529 E*

CONFEZIONE: 2500 pz. IN SCATOLA
*PACKAGING: 2500 pcs IN CARTON BOX*

SPQ: 2500 pz.

Descr.Std: HSG FOR FORK TERMINAL 9 CKT

EC NO: Z2007-0038 2006/09/20
DRWN: SBARBIER 2006/09/20
CHKD: RSANDANO 2006/09/25
APPR: FBISELLO
DESCRIPTION

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | mm | INCH |
|---|---|---|
| 4 PLACES | ± --- | ± --- |
| 3 PLACES | ± --- | ± --- |
| 2 PLACES | ± 0.1 | ± --- |
| 1 PLACE | ± 0.2 | ± --- |
| ANGULAR ± 2 ° | | |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

| | |
|---|---|
| DIMENSION STYLE | MM ONLY |
| SCALE | 2:1 |
| DESIGN UNITS | METRIC |
| | FIRST ANGLE PROJECTION |
| DRAWN BY | FGOTTARDO |
| DATE | 2001/09/17 |
| CHECKED BY | MTESTAGUZZA |
| DATE | 2001/09/17 |
| APPROVED BY | GZUIN |
| DATE | 2001/09/17 |
| MATERIAL NO. | SEE TABLE |
| DOCUMENT NO. | SD-94529-025 |
| SHEET NO. | 1 OF 00 |

TITLE
# 9 CKT HOUSING FOR STRAIGHT FORK TERMINAL

MOLEX INCORPORATED

SIZE A3 A2 REV

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION