


CONDUCTOR CONSTRUCTION (N/mm):  
41/0.254AS

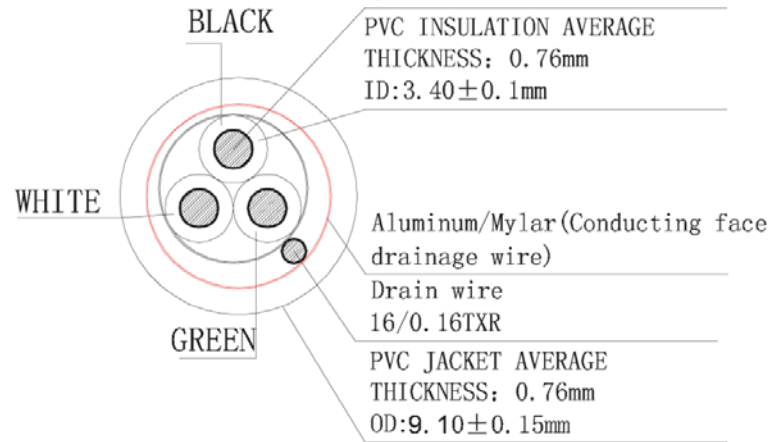

**Material:**

- E243929(UL) SJT 3 x 16AWG(1.31MM<sup>2</sup>) VW-1 Shielded, 60°C 300V
- CSA 228191 SJT 3 x 16AWG(1.31MM<sup>2</sup>) FT2 Shielded 60°C 300V -LF-
- Jacket Color: Black
- E- Green; L - Black; N - White

**Electrical:**

- 100% Open & Short Testing
- Insulation Resistance: 100MΩ (Min.)
- Voltage: 500V DC / 1 Min.

Unit: MM

Scale	1:1						Name	Item No.
TOLERANCE						Drawn	12.27.11	<b>AK500/16-OE-5-0.5</b>  Title Power Cord - SJT, 60°C, Shielded, Open End, 16AWG, .05 Meter  Drawing No.  Replace Sheet
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
								<b>rev00</b>
								Modification Date Name

