


1. Wiring Diagram.

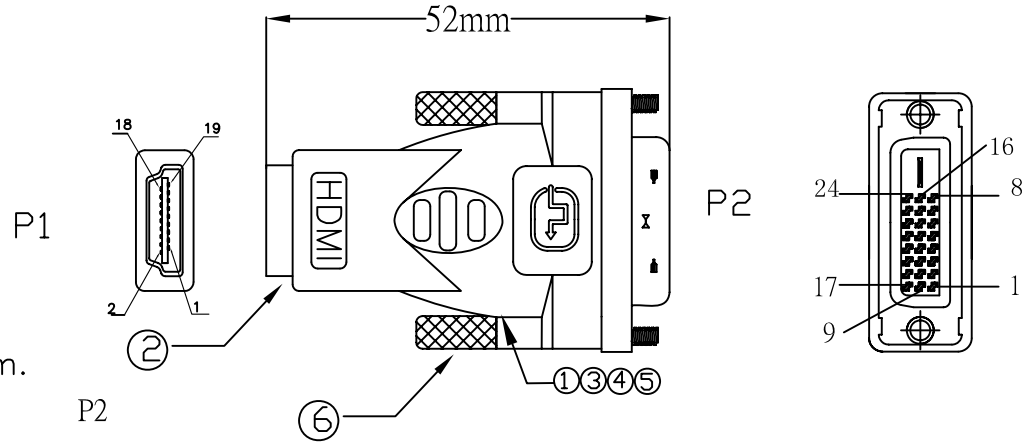

P1	P2
1	2
3	1
4	10
6	9
7	18
9	17
10	23
12	24
15	6
16	7
17	15
18	14
19	16
SHELL	SHELL

- 2. Cable test condition:
 Open/Short :100%
 Insulation resistance:5M ohm
 Contact resistance:2 ohm
 Hipot: DC 300V/1 sec
- 3.Each pcs with PE polybage

NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF
6	SCREW	#4-40UNC 21.5MM NICKEL	2	
5	PE	LLDPE 500026 6201	20g	
4	PVC	45P PVC BLACK OVERMOLD	50g	
3	CONN	HDMI FEMALE G/F INSULATION BLACKSHELL NICKEL PIN G/F	1	P2
2	CONN	DVI24+1 MALE G/F INSULATION BLACKSHELL NICKEL PIN G/F	1	P2
1	WIRE	UL1007 28AWG	14	55mm
BILL OF MATERIAL				

A	INITIAL RELEASE	2016/03/30
REV#	DESCRIPTION	DATE
CnC Tech,LLC		P/N: 452-A19F-24M
		TITLE: DVI24+1 M TO HDMI F ADAPTER
DRAWN: WENC	DATE: 16/03/30	CUSTOMER P/N:
CHECKED: EDWIN	DATE: 16/03/30	CUSTOMER:
APPROVAL:		SHEET 1 OF 1

