



COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-F-002220(A)	H.S.							
2	DIS-F-005226(B)	H.S.	H.T.	11.1.24					

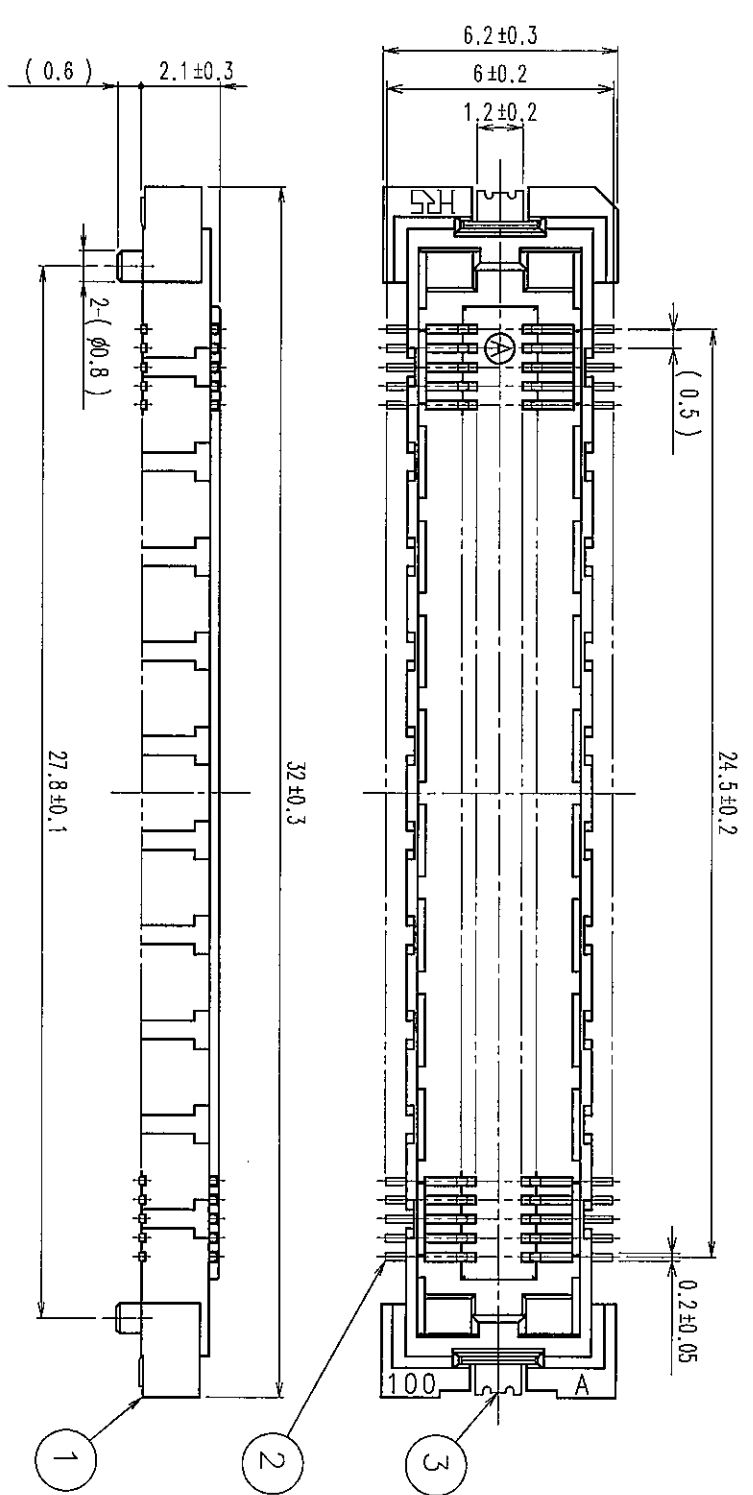

RECOMMENDED LAND PATTERN DIMENSION OF PCB

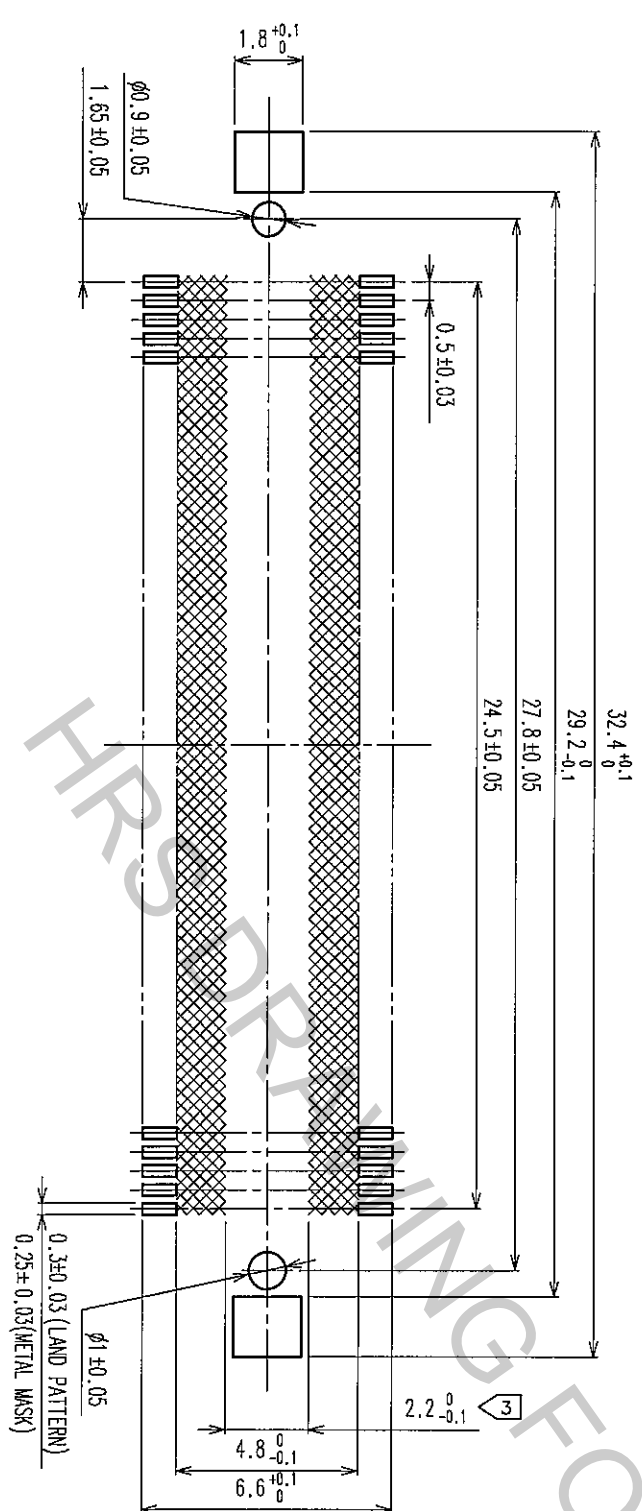

NOTES 1 SMT LEAD-COPLANARITY: 0.1 MAX.
 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 4 TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.

TO	
PCK	

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
1	LCP	BEIGE UL94V-0	3	PHOSPHOR BRONZE	TIN PLATED
2	PHOSPHOR BRONZE	CONTACT AREA: GOLD (0.1µm) OVER NICKEL LEAD: GOLD FLASH OVER NICKEL			

DRAWING NO.	EDC3-152641-02	PART NO.	FX11A-100S-SV(22)
SCALE	5 : 1	CODE NO.	CL573-0743-6-22
UNITS	MM		

DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
<i>M. Takano</i>	<i>M. Takano</i>	<i>M. Saito</i>	<i>T. Yamamoto</i>	
DATE	DATE	DATE	DATE	DATE
05.01.15	06.01.15	08.01.17	08.01.17	

