

# SP- 68

## Description:

Triad's high reliability audio transformers provide the durability and precision required in today's demanding designs. These transformers are available for a wide variety of applications.

## Electrical Specifications (@25C)

| Power level (mW) | Matching Impedance |                  | Max. Ma DC Unbalance in Primary | DC Resistance (Ω) |              | Overall Turns Ratio |
|------------------|--------------------|------------------|---------------------------------|-------------------|--------------|---------------------|
|                  | Primary            | Secondary        |                                 | Primary           | Secondary    |                     |
| 50               | 10,000             | 10,000 CT/2,500§ | 1.0                             | 1,000.0           | 565.0/650.0§ | 2.1:1.0             |




**Frequency Response:** ± 2.0 DB, at 300 Hz to 100K Hz

**Pri-Sec Hipot test (Pri-Sec):** 1,000 VRMS for 1 sec.

**Working voltage:** 150VDC

## Construction:

Plug-in terminals are precision spaced to provide fixed mounting centers. Epoxy molded case includes a .020" recess for ease of solder inspection. Leads are made of high strength Nickel alloy, gold plated and are .020" in diameter.

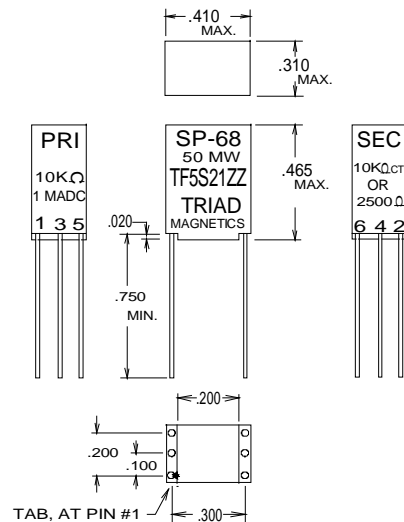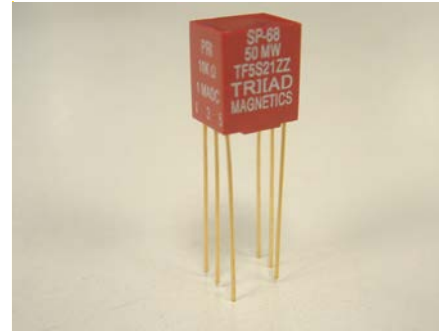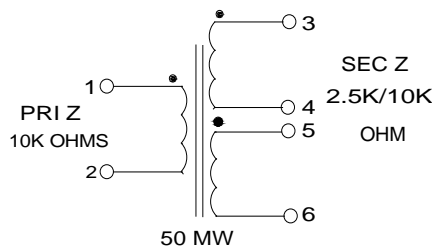

**RoHS Compliance:** As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

\*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics website for the most current version. For soldering and washing information please see <http://www.triadmagnetics.com/faq.html>